



82°

OUTDOOR WIRELESS TEMPERATURE TRANSMITTER AND RECEIVER KIT



Part No. WTR064

Accurately Displays
Current Outdoor Temperature and
Enables Dual Fuel* and
Automatic Humidity* Capability
on the LUXPRO® Thermostat

* SELECTED MODELS ONLY


LUXPRO®

Before you begin, make sure that the time on the LUXPRO® thermostat is set.
If not, set the time before starting the installation.

INSTALLATION INSTRUCTIONS

1. Install the included 2 AA batteries by removing the 4 screws located at the back of the transmitter. The LED on the transmitter will flash every 6 seconds. **Do not close the battery compartment yet.**
2. Remove the top cover of the thermostat and plug the receiver into the white connector located to the bottom left under the touch screen. **(A)**
3. Place the antenna wire into the 4th vent as shown **(B)**.
Clip the receiver into the 1st vent **(C)**.
4. Press the "RESET" button **(D)** on the receiver module for 10 seconds to activate the transmitter and receiver. The outdoor temperature will appear on your thermostat within 5 minutes. Make sure that the dot to the left of the outdoor temperature **(E)** flashes approximately every 15 seconds. If after 5 minutes the outdoor temperature is not displayed on the thermostat or if the dot to the left of the outdoor temperature **(E)** is not flashing, unplug the receiver module from the thermostat, remove batteries from the transmitter and start the installation procedure again.
5. Close the battery compartment and position the transmitter in a permanent location that is sheltered from the elements. After placing the transmitter in a permanent location, ensure that the dot to the left of the temperature **(E)** flashes approximately every 15 seconds. If the dot to the left of the temperature **(E)** is not flashing, change the transmitter location.
6. Use the chart below as a reference for the recommended humidity settings.

WARNING: Adjusting the humidity control higher than the recommended setting may cause condensation, resulting in possible damage to the home.

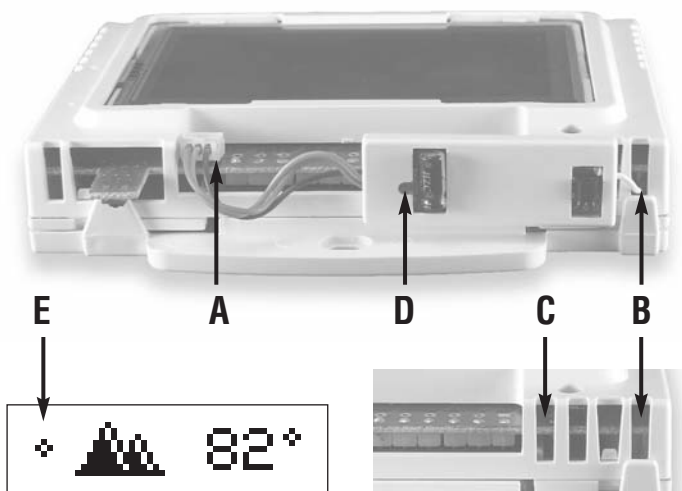

HUMIDITY SETTING RECOMMENDATIONS

At Outside Temperatures Of:	Humidity Setting:
-20°F (-29°C)	15 %
-10°F (-23°C)	20 %
0°F (-17°C)	25 %
+10°F (-12°C)	30 %
+20°F (-6°C)	35 %
Over +32°F (0°C)	40 %

OBTAINING WARRANTY SERVICE:

Customer must contact and return product to a local LUX Products Corporation product dealer or installer within the applicable warranty period to obtain warranty service. Dated proof of original purchase will be required.

HARDWARE:

LUX Products Corporation warrants the original end user ("Customer") that new LUXPRO® branded products will be free from defects in workmanship and materials, under normal use, for three (3) years from the original purchase date.

SOFTWARE:

LUX Products Corporation warrants to Customer that the LUXPRO® thermostat software will perform in substantial conformance to its program specifications a period of three (3) years from the date of the original purchase.

EXCLUSIONS:

This warranty excludes (1) physical damage to the surface of the product, including cracks or scratches on the touch-screen or outside casing; (2) damage caused by misuse, neglect, improper installation, unauthorized attempts to open, repair, or modify the product, or any other cause beyond the range of intended use; damage caused by accident, fire, power changes, other hazard, or Acts of God; (4) use of the product with any device if such device causes the problem.

EXCLUSIVE REMEDIES:

Should a covered defect occur during the warranty period and Customer notifies LUX Products Corporation, Customer's sole and exclusive remedy will be, at LUX Products Corporation's sole option and expense, to repair or replace the product. Replacement products or parts may be new or reconditioned or a comparable version of the defective item. LUX Products Corporation warrants any replaced product or part for a period of ninety (90) days from shipment, or through the end the original warranty, whichever is longer.

WARRANTY EXCLUSIVE:

THE FORGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND IN LIEU ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, CORRESPONDENCE WITH DESCRIPTION, AND NON INFRINGEMENT, ALL OF WHICH ARE EXPRESSLY DISCLAIMED BY LUX PRODUCTS CORPORATION AND ITS SUPPLIERS.

DISCLAIMER:

NEITHER LUX PRODUCTS CORPORATION NOR ITS SUPPLIERS SHALL BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE OR USE OF THIS PRODUCT, WHETHER BASED IN CONTRACT, TORT (INCLUDING NEGLIGENCE) OR ANY OTHER THEORY, EVEN IF LUX PRODUCTS CORPORATION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. LUX PRODUCTS CORPORATION'S ENTIRE LIABILITY SHALL BE LIMITED TO REPLACEMENT OR REPAIR OF THE PRODUCT.



FCC STATEMENT: THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT. THIS DEVICE HAS BEEN DESIGNED TO OPERATE WITH THE INCLUDED ANTENNA, AND HAVING A MAXIMUM GAIN OF 0 dBd. ANTENNAS NOT INCLUDED OR HAVING A GAIN GREATER THAN 0 dBd ARE STRICTLY PROHIBITED FOR USE WITH THIS DEVICE. THE REQUIRED ANTENNA IMPEDANCE IS 52 OHMS.